



AUTO STRIPPER

Hi-Strength fiber
Single &
Ribbon fibers

Patent Pending

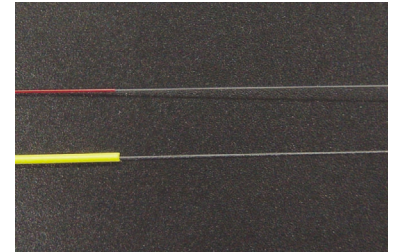

Single Fiber Strip

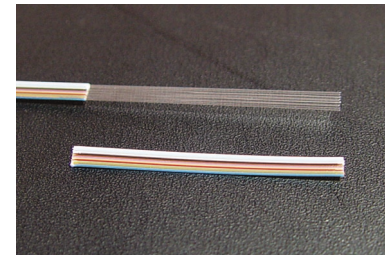


Ribbon Fiber Strip

**NO FIBER CRACK &
Fiber Tensile Strength Degradation**

- High Tensile Strength > 6.00 GPa
- Elimination of Fiber Cracking & Strength Degradation
- Stable Operation & High Precision Technologies

Tensile Strength Test Graph

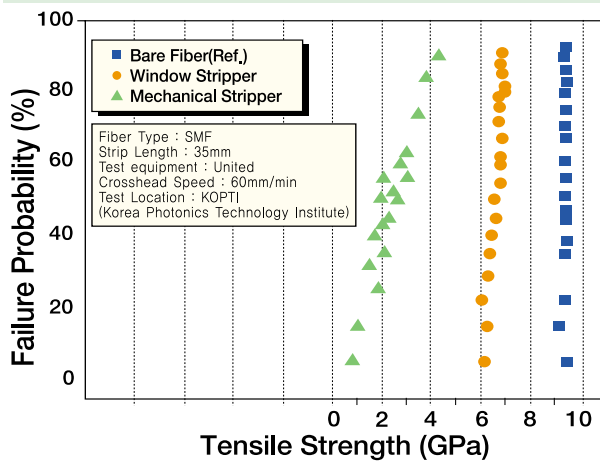

Technical Specification

Cable Diameter	250 - 900 μ m
Fiber Counts	Single to 12ct
Strip Length	30mm
Heating Temp.	60 $^{\circ}$ C - 140 $^{\circ}$ C
Temp. Setting Step	9 Steps
Heating Time	2 - 7sec
Time Setting Step	5 Steps
Power	DC 12V
Dim.(mm)	
Weight	

ILSINTECH Co., Ltd.
PRECISION TECHNOLOGY <http://www.ilsintech.com>

Headquarter & Technical Lab.
#130 Dongan-Ri, Okchun-Eup, Okchun-Kun, Chungbuk-Do, Korea
Tel : +82-43-7335371 Fax : +82-43-7335377

Domestic & Int' s Sales Division
#621 Dongah Venture Bldg., 538-8, Bongmyeong-dong, Yousung-gu, Dae-Jeon, Korea
Tel : +82 (42) 8287139-42
Fax : +82 (42) 8287143

